

Genie Flex®

Control Mechanisms:

- Auto-Adjust Body Balance #74C
- Quick Adjust Advanced Synchro #67C
- Stool: Auto-Adjust Body Balance #35C

Adjustable Arms:

- Basic Adjustable Arms #38A/#38AG
- Roll Back Arms #39A
- Adjustable Arms #51A/#51AG/#53A





Auto-Adjust Body Balance #74C





4-Position Tilt Limiter

Type: Rotatable knob

Rotate the outer dial for three seperate tension settings.
Rotate clockwise (forward) to increase tension & counter-clockwise (backward) to decrease tension.

Optional Seat Depth #12SS

Type: Pull paddle

Pull up on paddle while shifting your weight forward to move your seat forward. Shift backward to move your seat back.

Seat Height

Type: Pull paddle

Adjust the seat height by lifting your weight out of the chair and pulling up on the paddle. Proper seat height is realized when the top of your legs are somewhat parallel to the floor.




< Watch our 74C Online User Guide Watch our 74C-12SS > Online User Guide





Quick Adjust Advanced Synchro #67C

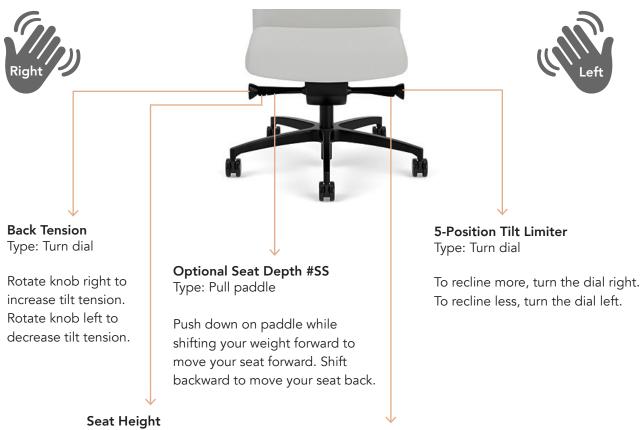

Type: Pull paddle

Adjust the seat height by lifting your weight out of the chair and pulling up on the paddle. Proper seat height is realized when the top of your legs are somewhat parallel to the floor.

Optional Forward Tilt #FT

Type: Pull paddle

Push the paddle in the down position and lean back in the chair. You will hear a click when the forward tilt mechanism has turned on. To turn off the forward tilt feature, lift the paddle in the up position and lean back in the chair. You will hear a click when the forward tilt mechanism has turned off.



< Watch our 67C-SS Online User Guide Watch our 67C-SS-FT > Online User Guide





Stool: Auto-Adjust Body Balance #35C





3-Position Tilt Limiter

Type: Rotatable knob

Rotate the outer dial for three seperate tension settings.
Rotate clockwise (forward) to increase tension & counterclockwise (backward) to decrease tension.

Foot Ring #11DR & #11XDR

Type: Footrest

Press down on the plastic inner hub and lift the foot ring up to unlock. Adjust to desired position. To lock, press down on the outer foot rest until hub is in locked position.

Seat Height

Type: Pull paddle

Adjust the seat height by lifting your weight out of the chair and pulling up on the paddle. Proper seat height is realized when the top of your legs are somewhat parallel to the floor.



< Watch our 35C Online User Guide Watch our Foot Ring > Online User Guide





Basic Adjustable Arms #38A/#38AG





Arm Height (Up/Down)

Type: Button

Press the button found beneath the armrest while grasping the armrest with both hands. Raise or lower each arm to desired height. Release the button. Rotate the switch located beneath the arm forward. Use your hand to grasp the arm and adjust it out to your desired width away from seat. Each arm adjusts separately. When finished making adjustments, rotate the switch back to its original position.



< Watch our 38A/38AG Online User Guide



Roll Back Arms #39A





Arm Height (Up/Down)

Type: Button

Press the button found beneath the armrest while grasping the armrest with both hands. Raise or lower each arm to desired height. Release the button.


While pressing and holding the small button toward the top front on the silver circle, grasp the arm and roll back to horizontal position where arm is parallel with the floor. Repeat to lift back to upright for use as an armrest.



< Watch our 39A Online User Guide



Adjustable Arms #51A/#51AG/#52A/#53A

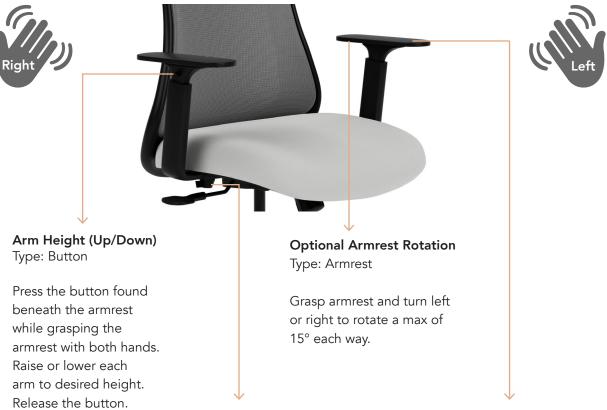

Optional Arm Width (In/Out)

Type: Switch

Rotate the switch located beneath the arm forward. Use your hand to grasp the arm and adjust it out to your desired width away from seat. Each arm adjusts separately. When finished making adjustments, rotate the switch back to its original position.

Optional Armrest Back/Forth

Type: Armrest

Grasp armrest & slide it forward or back to desire position.
Armrest slides forward a max of 1.5".



< Watch our 51A/51AG/52A/53A Online User Guide