

#### MODEL: 4U


Disassembly time: 15 minutes. No special training or skills needed



## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

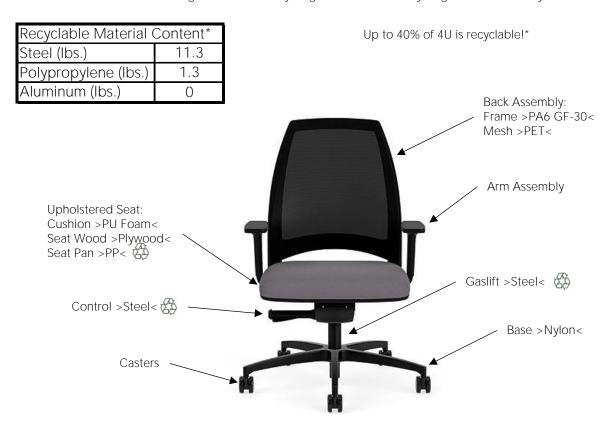

- 1. Supporting chair by base, hammer on control to free base from gaslift. Discard base.
- 2. Pull on casters by the stem to remove from base. Discard Casters.
- 3. Unscrew arm assembly from seat. Discard arms.
- 4. Unscrew control from seat. Unscrew seat pan from seat wood. Recycle pan and discard seat.
- 5. Unscrew the back from the control. Discard back assembly.
- 6. While holding gaslift, hammer on control to separate control and gaslift. Recycle both.

4U Mesh (780) Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



**MODEL: ASTRO** 

Disassembly time: 15 minutes. No special training or skills needed.



## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Remove seat and discard.
- 2. Flip chair over and unscrew control from chair.
- 3. Using a hammer, hold base and hammer on control to separate.
- 4. To separate base and gaslift, hold onto the gaslift and hammer on base.
- 5. Carefully cut away upholstery from the shell and remove. Discard.
- 6. Pull foam away from internal steel structure. Discard foam.
- 7. Recycle base, control, gaslift, and internal structure.

#### Astro (930) Shown

\*Based on standard models. Material weights may vary by configuration.

www.viaseating.com Customer Service: 800-433-6614 rev 4/20/2023



#### **MODEL: BRISBANE**

Disassembly time: 15 minutes. No special training or skills needed



## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Pry back shell from back assembly. Unscrew back support bar from back assembly.
- 2. Unscrew back support bar from control. Unscrew cover from back support bar. Discard back assembly.
- 3. Unscrew arm assembly from seat. Discard arms.
- 4. Supporting seat, hammer on base to separate it from gaslift. Discard base.
- 5. Unscrew control from seat. Discard seat.
- 6. Holding gaslift, hammer on control to separate.
- 7. Recycle gaslift, control, back shell, back support bar, and cover.

Brisbane Mid Back (1803) Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.

www.viaseating.com Customer Service: 800-433-6614 rev 4/20/2023



#### MODEL: BRISBANE HD

Disassembly time: 15 minutes. No special training or skills needed



#### Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Pry back shell from back assembly. Unscrew back support bar from back assembly.
- 2. Unscrew back support bar from control. Unscrew cover from back support bar. Discard back assembly.
- 3. Unscrew arm assembly from seat. Discard arms.
- 4. Supporting seat, hammer on base to separate it from gaslift. Discard base.
- 5. Unscrew control from seat. Discard seat.
- 6. Holding gaslift, hammer on control to separate.
- 7. Recycle gaslift, control, back shell, back support bar, and cover.

Brisbane HD Mid Back (1303) Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



#### MODEL: CARMEL

Disassembly time: 15 minutes. No special training or skills needed.



## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Remove arm assembly from seat. Discard arm assembly.
- 2. Holding chair up, hammer on base to separate it from gaslift. Discard base and casters.
- 3. Unscrew control from seat. Discard Back and Seat assembly.
- 4. Holding gaslift up, hammer on control to separate it from gaslift. Recycled gaslift and control.

Model 6903 Shown, all other models similar

Base > Nylon <

www.viaseating.com Customer Service: 800-433-6614 rev 4/20/2023

Casters

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### MODEL: CHICO BENCH

Disassembly time: 15 minutes. No special training or skills needed.




## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	46.4
Polypropylene (lbs.)	0
Aluminum (lbs.)	0

Up to 72% of Chico Bench is recyclable!\*

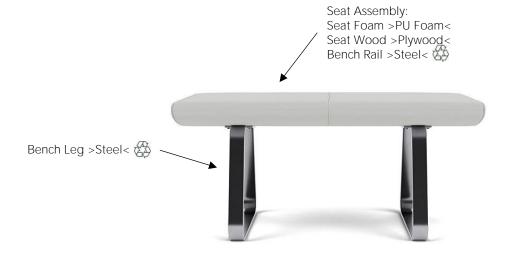

- 1. Unscrew bench legs from seat assembly.
- 2. Unscrew bench rail from seat assembly. Discard seat assembly.
- 3. Recycle legs and bench rail.


Model 974 Shown, all other models similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### MODEL: CHICO CHAIR

Disassembly time: 15 minutes. No special training or skills needed

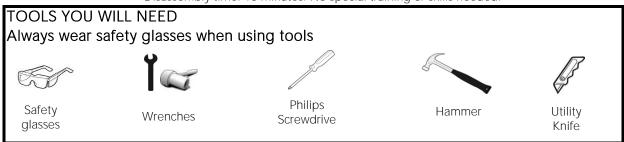

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	15.8
Polypropylene (lbs.)	0
Aluminum (lbs.)	6.7

Up to 75% of Chico is recyclable!\*



- 1. Unscrew control from back and seat shell.
- 2. Carefully using a utility knife, cut away the shell foam from the shell frame. Discard foam.
- 3. Holding control, hammer on base to separate from gaslift and control.
- 4. Holding gaslift up, hammer on control to separate from gaslift.
- 5. Recycle the shell frame, gaslift, control, and base.

Model 945 Shown, all other configurations similar

www.viaseating.com Customer Service: 800-433-6614 rev 4/20/2023

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### MODEL: CHICO OTTOMAN

Disassembly time: 15 minutes. No special training or skills needed.



## Recycling information




Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	4
Polypropylene (lbs.)	0
Aluminum (lbs.)	5.6

Up to 50% of Chico Ottoman is recyclable!\*

8

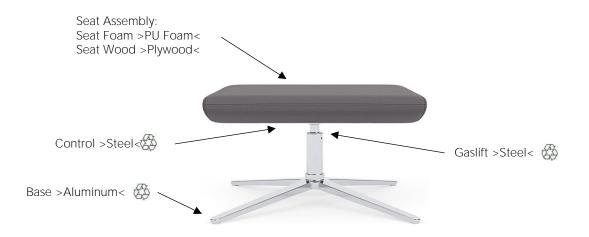

- 1. Holding up ottoman, hammer on base to separate it from gaslift.
- 2. Unscrew control from seat assembly. Discard seat assembly.
- 3. Holding onto gaslift, hammer on control to separate.
- 4. Recycle gaslift, control, and base.

Model 955 Shown, all other configurations similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



MODEL: COLEURI

Disassembly time: 15 minutes. No special training or skills needed.

# TOOLS YOU WILL NEED Always wear safety glasses when using tools Safety glasses Screwdriver

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	0.04
Polypropylene (lbs.)	7.94
Aluminum (lbs.)	0

Up to 59% of Coleurí is recyclable!\*



- 1. Place the chair upside down with the base facing up.
- 2. Unscrew the shell from the base.
- 3. Recycle the shell and discard the base.


Model 510 Shown, all other models similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### MODEL: COMET

Disassembly time: 15 minutes. No special training or skills needed

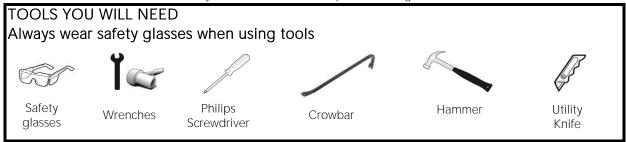

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	16.2
Polypropylene (lbs.)	0
Aluminum (lbs.)	0

Up to 42% of Comet is recyclable!\*



- 1. Remove seat cushion and discard.
- 2. Flip chair over and unscrew control from shell.
- 3. Holding control up, hammer on base to separate from gaslift. Discard base and casters.
- 4. Holding gaslift up, hammer on control to separate from gaslift.
- 5. Using utility knife, carefully cut away foam from internal structure. Discard foam.
- 6. Using a crow bar, remove shell wood from internal structure. Discard shell wood.
- 7. Recycle gaslift, control, and internal structure.


Model 925 Shown, all other configurations similar

\*Based on standard models. Material weights may vary by configuration.



MODEL: CORTINA

Disassembly time: 15 minutes. No special training or skills needed.

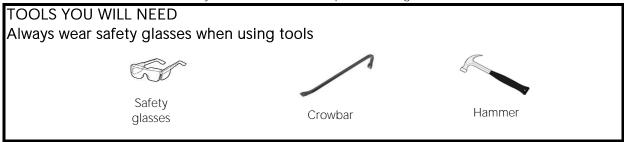

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	28.4
Polypropylene (lbs.)	0
Aluminum (lbs.)	0

Up to 99% of Cortina is recyclable!\*



1. Recycle frame, back, and seat.

Model D220 Shown, all other models similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



## \*\*\*Dyce has been discontinued\*\*\*

MODEL: DYCE

Disassembly time: 15 minutes. No special training or skills needed



## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material (	Content*
Steel (lbs.)	19.3
Polypropylene (lbs.)	0
Aluminum (lbs.)	0

Up to 50% of Dyce is recyclable!\*



- 1. Flip chair over and unscrew arm assembly. Discard arm assemblies.
- 2. Unscrew control from back and seat shell.
- 3. Holding control up, hammer on base to remove from gaslift. Discard base and casters.
- 4. Holding gaslift up, hammer on control to separate from gaslift.
- 5. Use utility knife to carefully remove foam from internal structure. Discard foam.
- 6. Recycle gaslift, control, and internal structure.


Model 5301 Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



#### MODEL: ECLIPSE

Disassembly time: 15 minutes. No special training or skills needed.

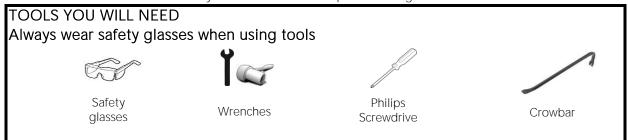

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	5.4
Polypropylene (lbs.)	4.6
Aluminum (lbs.)	0

Up to 99% of Eclipse is recyclable!\*



- 1. Flip chair over and pry seat cover from shell.
- 2. Pull off arm covers. Unscrew arms from frame. Unscrew arm caps from arm frame.
- 3. Unscrew shell from base.
- 4. Pull off glides from frame.
- 5. Recycle shell, base, seat cover, arm covers, arm caps, arm frames, and glides.


Model 640 Shown, all other models similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### MODEL: ECLIPSE WIRED

Disassembly time: 15 minutes. No special training or skills needed.

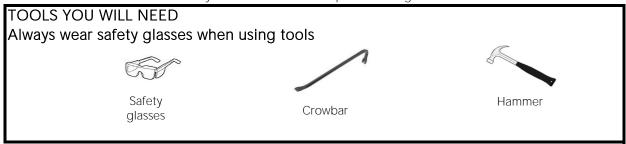


## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	13.9
Polypropylene (lbs.)	0
Aluminum (lbs.)	0

Up to 98% of Eclipse Wired is recyclable!\*

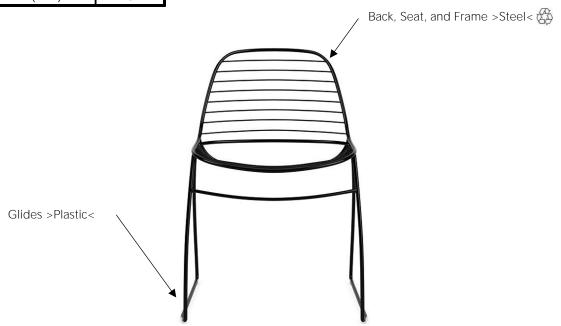

- 1. Remove glides from chair. Discard glides.
- 2. Recycle back, seat, and frame.


Model 649 Shown, all other configurations similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



MODEL: EDGE

Disassembly time: 15 minutes. No special training or skills needed

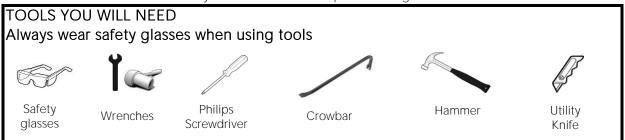

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Remove seat cushion and discard.
- 2. Flip chair over and unscrew control from shell.
- 3. Holding control up, hammer on base to separate from gaslift. Discard base and casters.
- 4. Holding up gaslift, hammer on control to separate.
- 5. Using utility knife, carefully remove foam from internal structure. Discard foam.
- 6. Using the crow bar, pry shell wood from internal structure. Discard shell wood.
- 7. Recycle gaslift, control, and internal structure.


Model 985 Shown, all other configurations similar

\*Based on standard models. Material weights may vary by configuration.



#### **MODEL: GENIE**

Disassembly time: 15 minutes. No special training or skills needed.

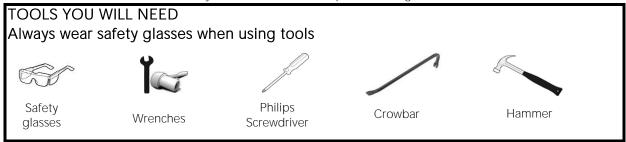

#### Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	11.5
Polypropylene (lbs.)	7
Aluminum (lbs.)	0

Up to 52% of Genie is recyclable!\*



- 1. Flip chair over and unscrew back support bar from control. Unscrew control from seat assembly.
- 2. Unscrew arm assembly from seat assembly. Discard arms.
- 3. Pry back support cover from back frame. Unscrew back support bar from frame. Discard back frame and mesh.
- 4. Unscrew the seat pan from the seat wood. Discard the seat wood and seat foam.
- 5. Holding the control up, hammer on base to separate it from gaslift. Discard base and casters.
- 6. Holding gaslift up, hammer on control to separate from gaslift.
- 7. Recycle the control, gaslift, seat pan, back support bar, and back support cover.

Model 401 Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



#### **MODEL: GENIEFLEX**


Disassembly time: 15 minutes. No special training or skills needed



#### Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

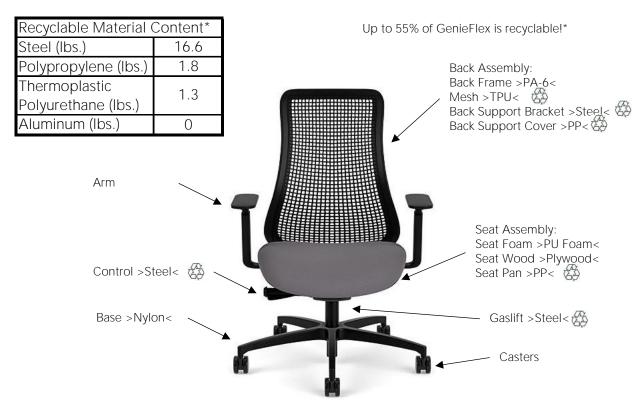

- 1. Flip chair over and unscrew back support bracket from control. Unscrew control from seat assembly.
- 2. Unscrew arm assembly from seat assembly. Discard arms.
- 3. Pry the back support cover from the back frame. Unscrew the back support bracket from the frame.
- 4. Pull the mesh from the back frame. Discard the frame.
- 5. Unscrew the seat pan from the seat wood. Discard the seat wood and seat foam.
- 6. Holding the control up, hammer on the base to separate it from gaslift. Discard base and casters.
- 7. Holding the gaslift up, hammer on control to separate it from the gaslift.
- 8. Recycle the gaslift, control, seat pan, back support bracket, back support cover, and mesh.

Model 440 Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.

www.viaseating.com Customer Service: 800-433-6614 rev 4/20/2023



#### **MODEL: JETE**

Disassembly time: 15 minutes. No special training or skills needed.



## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	25.4
Polypropylene (lbs.)	0
Aluminum (lbs.)	0

Up to 58% of Jete is recyclable!\*



- 1. Unscrew control from seat. Unscrew arms from seat.
- 2. Carefully using a utility knife, cut foam away from internal structure. Discard foam.
- 3. Holding control up, hammer on base to separate it from gaslift. Discard base and casters.
- 4. Holding gaslift up, hammer on control to separate.
- 5. Recycle arms, internal structure, control, and gaslift.


Jete Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



#### **MODEL: LINATE**

Disassembly time: 15 minutes. No special training or skills needed.

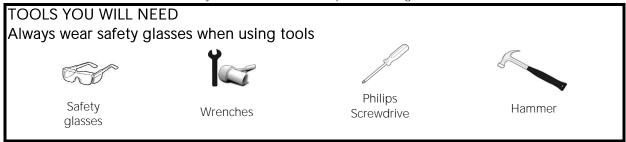

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Flip chair over and unscrew arms from seat. Discard arms.
- 2. Unscrew control from seat. Discard back and seat assembly.
- 3. Holding control up, hammer on base to separate it from gaslift. Discard base and casters
- 4. Holding up gaslift, hammer on control to separate. Recycle control and gaslift.


Model 5501 Shown, all other models similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### MODEL: LUNA


Disassembly time: 15 minutes. No special training or skills needed.

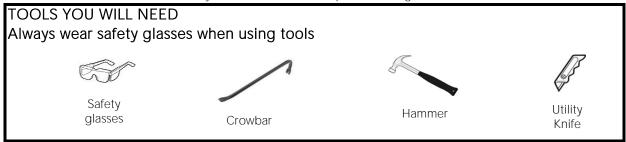

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

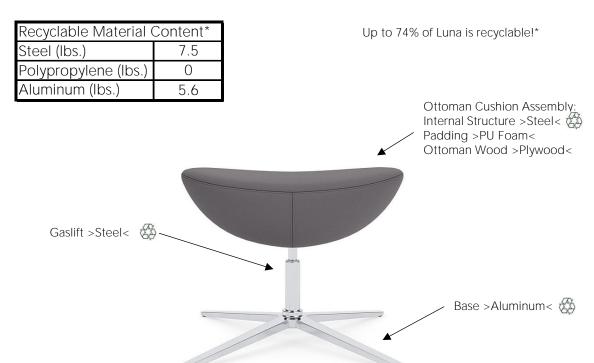

- 1. Flip ottoman over and hammer on cushion to separate it from gaslift.
- 2. Holding gaslift up, hammer on base to separate it from gaslift.
- 3. Carefully use utility knife to cut away foam from internal structure. Discard foam.
- 4. Pry plywood from internal structure. Discard plywood.
- 5. Recycle gaslift, base, and internal structure.


Model 926 Shown, all other configurations similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### **MODEL: METEOR**

Disassembly time: 15 minutes. No special training or skills needed

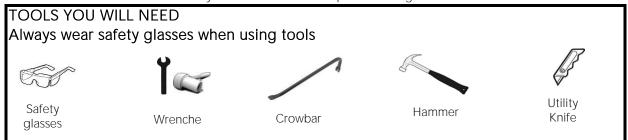

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Remove cushion and discard.
- 2. Flip chair over and unscrew control from shell.
- 3. Holding control up, hammer on base to separate it from gaslift.
- 4. Holding gaslift up, hammer on control to separate.
- 5. Carefully use utility knife to remove foam from internal structure. Discard foam.
- 6. Pry plywood from internal structure. Discard plywood.
- 7. Recycle control, gaslift, base, and internal structure.

Model 925 Shown, all other configurations similar

\*Based on standard models. Material weights may vary by configuration.



#### MODEL: MOONTABLE

Disassembly time: 15 minutes. No special training or skills needed.



## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material	Content*
Steel (lbs.)	47.5
Polypropylene (lbs.)	0
Aluminum (lbs.)	0

Up to 99% of Moontable is recyclable!\*



- 1. Unbolt legs from surface.
- 2. Recycle surface and legs.


Model D425 Shown, all other models similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### MODEL: MUIR

Disassembly time: 15 minutes. No special training or skills needed.

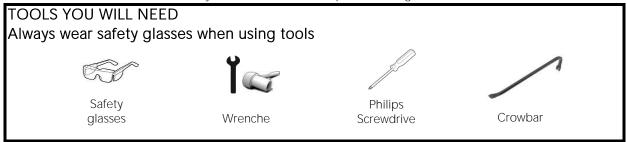


## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	21.8
Polypropylene (lbs.)	0
Aluminum (lbs.)	0

Up to 49% of Muir is recyclable!\*

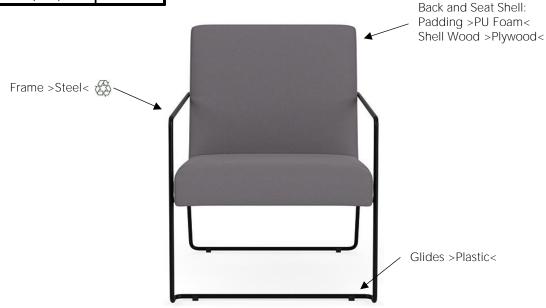

- 1. Flip chair over and remove glides from frame. Discard glides.
- 2. Unscrew frame from the bottom of the seat.
- 3. Discard back and seat shell. Recycle frame.


Model 937 Shown, all other configurations similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### MODEL: NEBULA

Disassembly time: 15 minutes. No special training or skills needed.

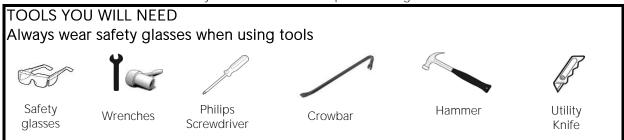

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Remove cushion and discard.
- 2. Lay chair on back. Unscrew base from bottom of shell.
- 3. Carefully use utility knife to cut and pull away foam from internal structure. Discard foam.
- 4. Pry plywood from internal structure. Discard plywood.
- 5. Recycle the frame and internal structure.


Model 935 Shown, all other configurations similar

\*Based on standard models. Material weights may vary by configuration.



#### MODEL: ONDA


Disassembly time: 15 minutes. No special training or skills needed.

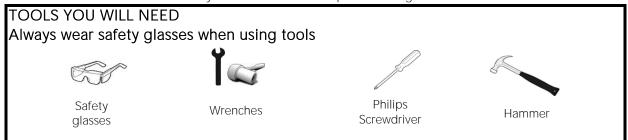

#### Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

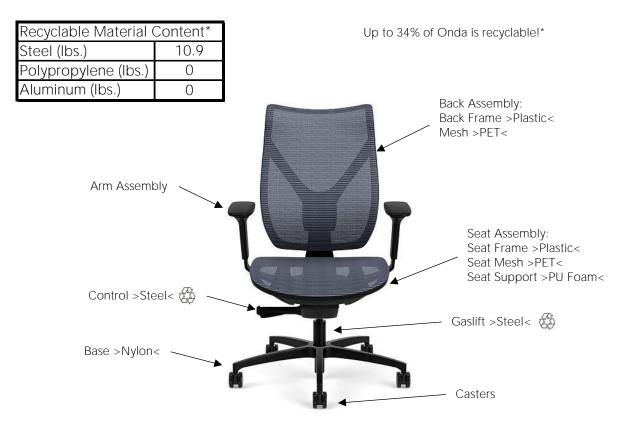

- 1. Flip chair over and unscrew arms from seat. Discard arms.
- 2. Unscrew control from seat. Unscrew back support bar from control. Discard back and seat assembly.
- 3. Holding up control, hammer on base to separate it from gaslift. Discard base and casters.
- 4. Holding up gaslift, hammer on control to separate it from gaslift.
- 5. Recycle control and gaslift.


Model 201 Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



MODEL: ORBIT

Disassembly time: 15 minutes. No special training or skills needed

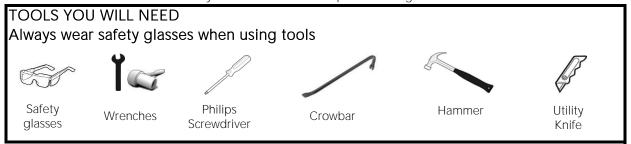

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Remove cushion and discard.
- 2. Flip chair over and unscrew control from upholstered shell.
- 3. Holding control up, hammer on base to separate from gaslift. Discard base and casters.
- 4. Holding up gaslift, hammer on control to separate from gaslift.
- 5. Using a utility knife, carefully remove foam from internal structure. Discard foam.
- 6. Pry seat wood from internal structure. Discard seat wood.
- 7. Recycle control, gaslift, and internal structure.


Model 928 Shown, all other configurations similar

\*Based on standard models. Material weights may vary by configuration.



#### MODEL: OSLO

Disassembly time: 15 minutes. No special training or skills needed

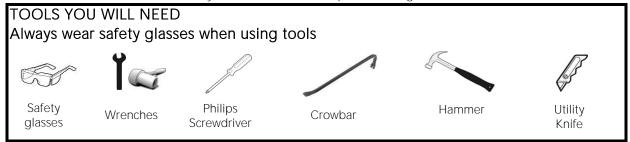

#### Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Flip chair over and unscrew back support bar from control. Unscrew control from seat assembly.
- 2. Unscrew arm assembly from seat. Discard arms and seat.
- 3. Using a utility knife, cut upholstery and foam from back of back assembly. Discard upholstery and foam.
- 4. .Unscrew back support bar from back assembly. Remove foam from internal structure and discard foam.
- 5. Holding control up, hammer on base to separate from gaslift. Discard base and casters.
- 6. Holding gaslift up, hammer on control to separate.
- 7. Recycle control, gaslift, back support bar, and internal structure.

Model 7101 Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



#### MODEL: PROFORM

Disassembly time: 15 minutes. No special training or skills needed.



#### Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Flip chair over and unscrew back support bar from control. Unscrew control from seat assembly.
- 2. Unscrew arm assembly from seat. Discard arms and seat assembly.
- 3. Holding control up, hammer on base to separate it from gaslift. Discard base and casters.
- 4. Holding gaslift up, hammer on control to separate.
- 5. Pull mesh from back frame. Discard mesh.
- 6. Unscrew back support bar from back frame.
- 7. Recycle control, gaslift, back frame, and back support bar.

Model 151 Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



#### MODEL: RESET


Disassembly time: 15 minutes. No special training or skills needed.



## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

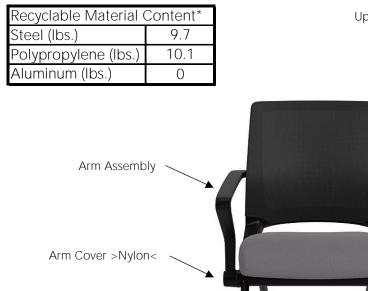

Up to 71% of Reset is recyclable!\*



- 1. Remove arm covers. Unscrew arms and back assembly from frame. Unscrew arms from back frame. Discard arms.
- 2. Pry mesh from back frame. Unscrew back frame from back bracket. Discard mesh.
- 3. Flip chair over and unscrew seat assembly from frame. Pry the seat pans from the seat foam. Discard seat foam.
- 4. Pull casters from frame. Discard casters.

Casters

5. Recycle the back frame, back brackets, inner and outer seat pan, and frame.


Model 350 Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



#### MODEL: RISE

Disassembly time: 15 minutes. No special training or skills needed

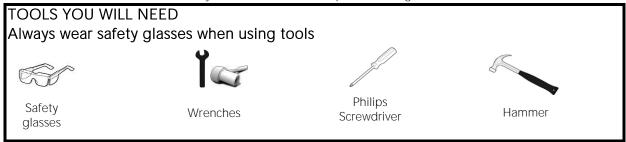

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	9.7
Polypropylene (lbs.)	0
Aluminum (lbs.)	0
Aluminam (103.)	U

Up to 36% of Rise is recyclable!\*



- 1. Flip chair over and unscrew arms from seat. Discard arms.
- 2. Unscrew the back frame from the control. Discard the back assembly.
- 3. Unscrew the control from the seat. Discard the seat.
- 4. Holding the control up, hammer on the base to separate it from the gaslift.
- 5. Holding the gaslift up, hammer on the control to separate it from the gaslift.
- 6. Take the base and pull the casters out of the base to remove them. Discard the base and casters.
- 7. Recycle the gaslift and control.


Model 220 Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



#### MODEL: RIVA

Disassembly time: 15 minutes. No special training or skills needed

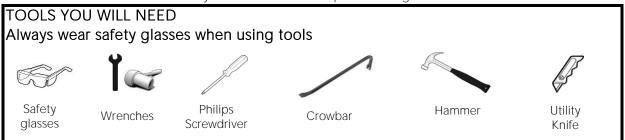

#### Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Flip chair over and unscrew arms from seat. Discard arms.
- 2. Unscrew back support bar from control. Unscrew control from seat. Discard seat.
- 3. Holding control up, hammer on base to separate it from gaslift. Discard base and casters.
- 4. Holding gaslift up, hammer on control to separate it from gaslift.
- 5. Pry outer back shell from back assembly. Unscrew back support bar from inner back shell.
- 6. Pry back foam from inner back shell. Discard back foam. Unscrew back support cover from back support bar.
- 7. Recycle the control, gaslift, inner and outer back shell, back support bar, and back support covers.


Model 3403 Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



#### MODEL: RUN II

Disassembly time: 15 minutes. No special training or skills needed.

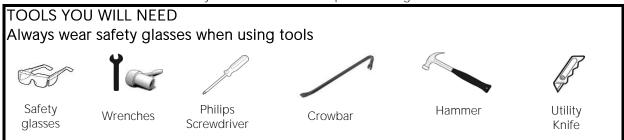

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Flip chair over and unscrew arms from seat. Discard arms.
- 2. Unscrew back assembly from control. Unscrew control from seat. Discard seat assembly and back assembly.
- 3. Holding control up, hammer on base to separate it from gaslift. Discard base and casters.
- 4. Holding gaslift up, hammer on control to separate it from gaslift.
- 5. Recycle gaslift and control.

Model 971 Shown, all other models similar


\*Based on standard models. Material weights may vary by configuration.



\*\*\*Sienna has been discontinued\*\*\*

#### **MODEL: SIENNA**


Disassembly time: 15 minutes. No special training or skills needed.

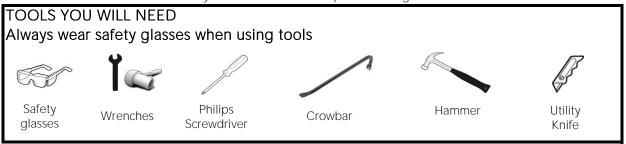


#### Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



Up to 40% of Sienna is recyclable!\*

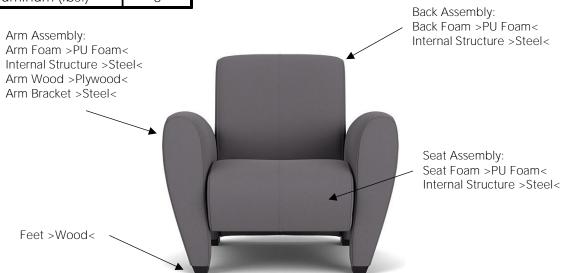

- 1. Turn chair over. Unscrew brackets connecting upholstered components.
- 2. Pull feet from arm assembly. Discard feet.
- 3. Carefully use a utility knife to cut and pull away foam from internal structure. Discard foam.
- 4. Pry arm wood from internal arm structure. Discard arm wood.
- 5. Recycle brackets and internal structures.

Model 95-RSL Shown, all other models similar


www.viaseating.com Customer Service: 800-433-6614 rev 4/20/2023

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



MODEL: SIERRA

Disassembly time: 15 minutes. No special training or skills needed.

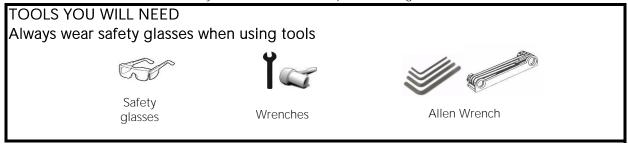


## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	113.9
Polypropylene (lbs.)	0
Aluminum (lbs.)	0

Up to 99% of Sierra is recyclable!\*

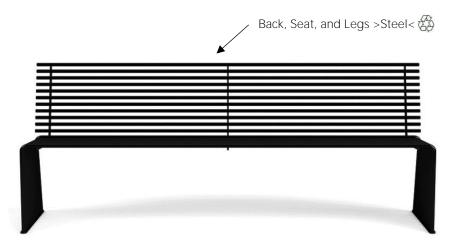

- 1. Using Allen key and wrench, remove bolts and nuts along components.
- 2. Recycle all Sierra components.

Model XBS20 Shown, all other models similar


www.viaseating.com Customer Service: 800-433-6614 rev 4/20/2023

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### MODEL: SPEC STOOL

Disassembly time: 15 minutes. No special training or skills needed.

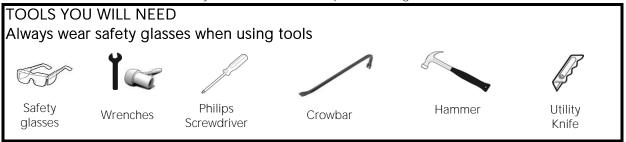

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	6.7
Polypropylene (lbs.)	0
Aluminum (lbs.)	0

Up to 38% of Spec Stool is recyclable!\*



- 1. Holding chair up, hammer on base to separate it from gaslift. Discard base and casters.
- 2. Turn chair upside down and unscrew control from seat assembly. Discard seat assembly.
- 3. Holding gaslift up, hammer on control to separate it from gaslift.
- 4. Recycle control and gaslift.


Model 1416 Shown, all other models similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



MODEL: SPLASH

Disassembly time: 15 minutes. No special training or skills needed.

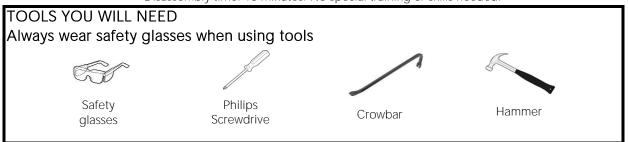


## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	9.8
Polypropylene (lbs.)	1
Aluminum (lbs.)	0

Up to 84% of Splash is recyclable!\*

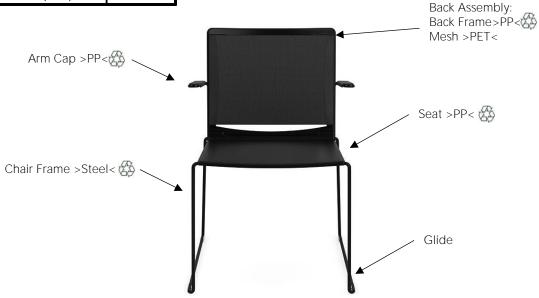

- 1. Remove glides from frame and discard.
- 2. Unsnap seat, arm caps, and back frame from chair frame.
- 3. Remove mesh from back frame. Discard mesh.
- 4. Recycle chair frame, arm caps, seat, and back frame.


Model 802 Shown, all other models similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### **MODEL: SPLASHAIR**


Disassembly time: 15 minutes. No special training or skills needed.

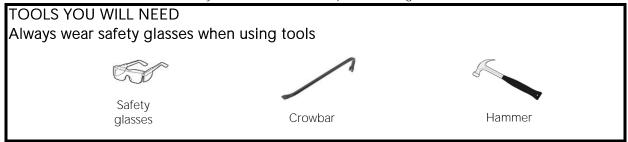

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

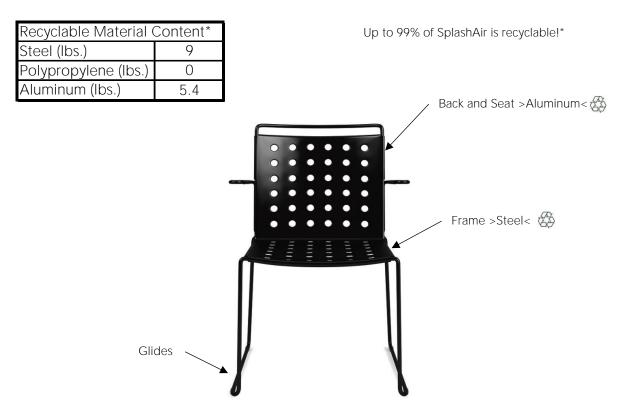

- 1. Remove glides from chair. Discard glides.
- 2. Recycle frame, seat, and back.


Model 820 Shown, all other models similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### **MODEL: SUTRO**


Disassembly time: 15 minutes. No special training or skills needed.

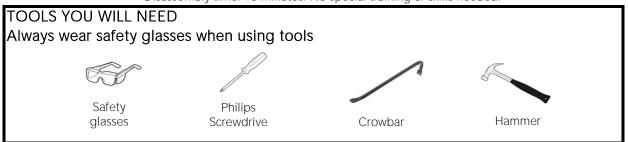

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

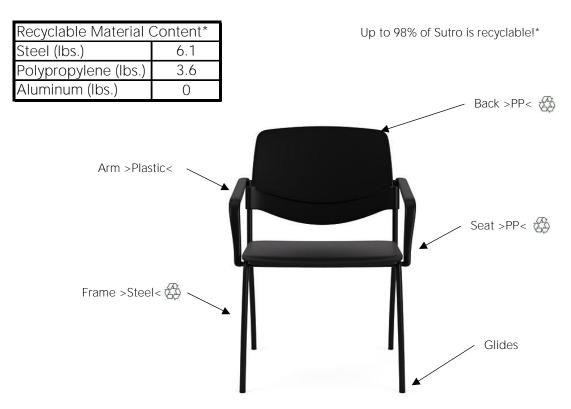

- 1. Pull glides from frame. Discard glides.
- 2. Remove arms from frame with hammer. Discard arms.
- 3. Flip Char over and unscrew seat from frame.
- 4. Pull back up from frame.
- 5. Recycle back, seat, and frame.

Model 602 Shown, all other models similar


\*Based on standard models. Material weights may vary by configuration.

www.viaseating.com Customer Service: 800-433-6614 rev 4/20/2023



#### **MODEL: TAHOE**

Disassembly time: 15 minutes. No special training or skills needed.

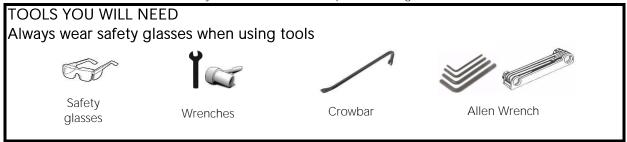


## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	78.8
Polypropylene (lbs.)	0
Aluminum (lbs.)	63.1

Up to 99% of Tahoe is recyclable!\*

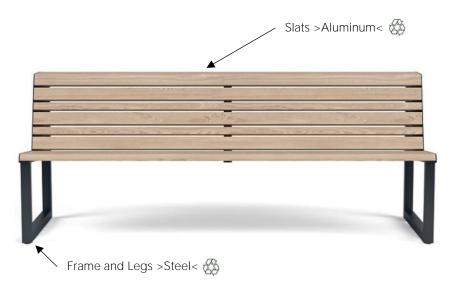

- 1. Remove bolts from slats that are connected to frame and legs.
- 2. Recycle slats, frame, and legs.

Model TBN15 Shown, all other models similar


www.viaseating.com Customer Service: 800-433-6614 rev 4/20/2023

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.



#### MODEL: TAHOE WITH MIAMI SUNSHADE

Disassembly time: 15 minutes. No special training or skills needed.

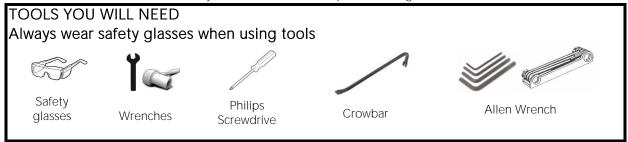


## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	137.6
Polypropylene (lbs.)	0
Aluminum (lbs.)	24.6

Up to 96% of Tahoe with Miami Sunshade is recyclable!\*

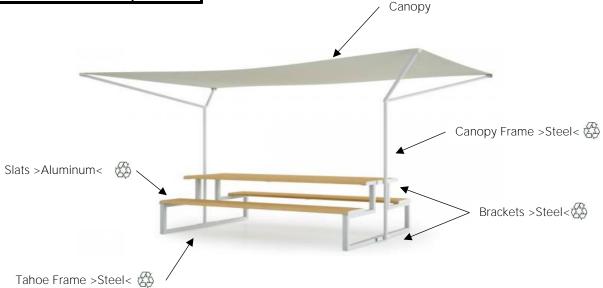

- 1. Remove canopy from canopy frame. Discard canopy.
- 2. Use a screwdriver and Allen wrench to remove brackets from Tahoe Frame.
- 3. Remove canopy frame from Tahoe frame.
- 4. Remove bolts from slats and Tahoe frame.
- 5. Recycle the brackets, canopy frame, slats, and Tahoe frame.

Model TPN15-2-N-DSS1 Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



#### MODEL: TERRA


Disassembly time: 15 minutes. No special training or skills needed.



## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

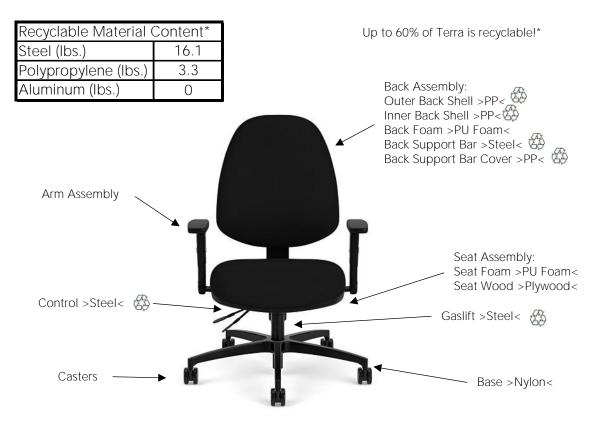

- 1. Flip chair over and unscrew arm assembly from seat assembly. Discard arms.
- 2. Unscrew back assembly from control. Unscrew control from seat assembly. Discard seat assembly.
- 3. Holding control up, hammer on base to separate it from gaslift. Discard base and casters.
- 4. Holding gaslift up, hammer on control to separate.
- 5. Pry outer back shell from back assembly. Unscrew back support bar from inner back shell.
- 6. Pry inner back shell from back foam. Discard foam.
- 7. Unscrew back support bar cover from back support bar.
- 8. Recycle gaslift, control, back support bar & cover, and inner and outer back shell.

Model 124 Shown, all other models similar


\*Based on standard models. Material weights may vary by configuration.

www.viaseating.com Customer Service: 800-433-6614 rev 4/20/2023



MODEL: VERO

Disassembly time: 15 minutes. No special training or skills needed

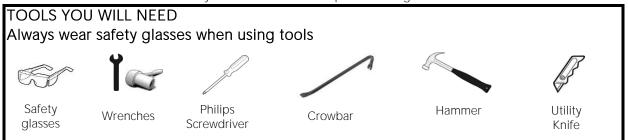

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Flip chair over and unscrew arm assembly from seat assembly. Discard arms.
- 2. Unscrew back assembly from control. Unscrew control from seat assembly. Discard seat assembly.
- 3. Carefully use a utility knife to remove upholstery from back of back assembly.
- 4. Unscrew back support bar from back assembly. Remove foam from internal structure. Discard foam.
- 5. Holding control up, hammer on base to separate it from gaslift. Discard base and casters.
- 6. Holding gaslift up, hammer on control to separate.
- 7. Recycle control, gaslift, internal structure, and back support bar.


Model 873 Shown, all other models similar

\*Based on standard models. Material weights may vary by configuration.



#### MODEL: VISTA II

Disassembly time: 15 minutes. No special training or skills needed

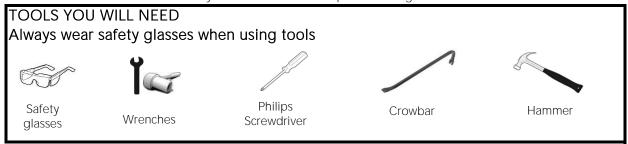


## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material (	Content*	Up to 66% of V
Steel (lbs.)	9.6	
Polypropylene (lbs.)	3.3	
Aluminum (lbs.)	0	
Arm Assembly		

Up to 66% of Vista II is recyclable!\*

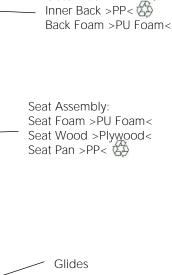

43

Back Assembly: Outer Back >PP<

- 1. Pry arm assembly from frame and pull arms out. Discard arms.
- 2. Unscrew back assembly from frame. Pry back foam from inner back. Discard foam.
- 3. Unscrew inner back from outer back.

Frame >Steel<

- 4. Flip chair over. Unscrew seat pan from seat assembly. Unscrew seat assembly from frame. Discard seat assembly
- 5. Pull glides from frame. Discard glides.
- 6. Recycle frame, seat pan, inner back, and outer back.

Model 302 Shown, all other models similar


\*Based on standard models. Material weights may vary by configuration.



\*\*\*Voss has been discontinued\*\*\*

MODEL: VOSS

Disassembly time: 15 minutes. No special training or skills needed

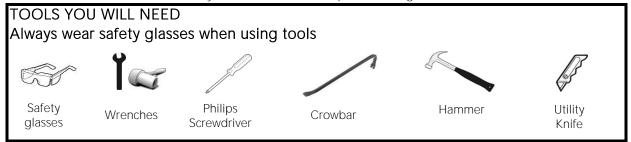

#### Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.

Recyclable Material Content*	
Steel (lbs.)	27
Polypropylene (lbs.)	0
Aluminum (lbs.)	0

Up to 62% of Voss is recyclable!\*



- 1. Flip chair over. Unscrew arm assembly from seat assembly. Discard arms.
- 2. Unscrew back support bar from control. Unscrew control from seat assembly. Discard seat assembly.
- 3. Carefully use a utility knife to cut away upholstery and foam from back of the back assembly. Discard upholstery.
- 4. Unscrew back support bar from back assembly. Cut away foam from internal structure. Discard foam.
- 5. Holding control up, hammer on base to separate it from the gaslift. Discard base and casters.
- 6. Holding gaslift up, hammer on control to separate it from gaslift.
- 7. Recycle control, gaslift, back support bar, and internal structure.

Model 2V27 Shown, all other models similar


\*Based on standard models. Material weights may vary by configuration.

www.viaseating.com Customer Service: 800-433-6614 rev 4/20/2023



#### MODEL: ZEE

Disassembly time: 15 minutes. No special training or skills needed.

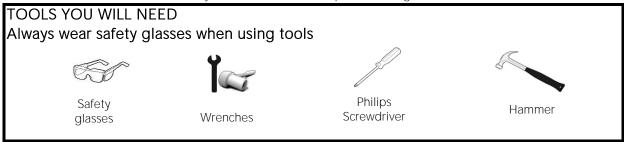

## Recycling information



Indicates a part is recyclable. For material recycling information refer to Via End of Life Recovery Options Matrix at www.viaseating.com or www.recyclingmarkets.net for recycling infrastructure in your area.



- 1. Flip chair over. Unscrew shell from frame.
- 2. Pull glides out of frame. Discard glides.
- 3. Recycle shell and frame.

Model 731 Shown, all other models similar

<sup>\*</sup>Based on standard models. Material weights may vary by configuration.